



5,200 tons Cable Carousel Package

1 pc. Offshore Cable Carousel, Basket type for top loading of product

1 pc. Loading Tower c/w hydraulic operated Cable Loading Arm, 10 Te Cable Tensioner, Cable Guide for MBR 4.2 m, Control Cabin and EPU-container containing circuit boards, frequency controllers, brake resistors, etc., ready for plug-in of Carousel




Technical particulars 4,000 Te Offshore Cable Carousel

Max. load capacity offshore:
Max. load capacity onshore (cable storage):
Outside extreme diameter of carousel:
Outer diameter of «basket»:
Inner diameter of «basket»:
Height of «basket»:
Volume of «basket»:
Weight of carousel:
Centre of gravity above base:
Carousel speed, stepless:
Nos. of frequency controlled pinion drives:
Power supply (Dual voltage):
Certified by:
Built year:

4.000 metric tons 5,200 metric tons 23.30 m 23.00 m 4.00 m 6.00 m 2,416 m³ 380 metric tons 2.30 m 0 to 1.0 RPM 4 pcs., each 75/84 kW 3 ph., 400/440 V, 50/60 Hz DNV GL 2016

Technical particulars Loading Tower

Weight of loading tower complete:	60 metric tons
Max. product diameter:	500 mm
Max. product weight:	300 kg/m
MBR of product:	4.20 m
Cable Loading Arm:	
Power requirement: 11 kW, 3 ph., 400/440 V, 50/60 Hz	
10 Te Cable Tensioner:	
Max. tension:	10 metric tons
Max. opening:	500 mm
Max. speed:	1,000 m/h
Power requirement: 32 kW, 3 ph., 400/440 V, 50/60 Hz	
Built year:	2016

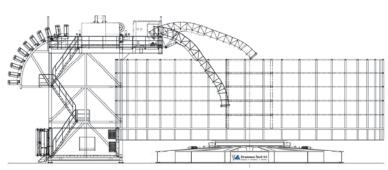





- Environmentally friendly equipment
- Few moving parts, low maintenance
- Quiet in operation
- Electric drives
- Long life

Carousel Package ready available, please contact:

trond.odden@drammenyard.no Tel.: +47 32 88 26 30, Mobile: +47 915 20 065 www.drammenyard.no/cable-carousels